


## OFFLINE SOFTWARE UPDATE


1. Open «Sius Cockpit»
2. Navigate to Range Board Launcher, click on «Open»
3. Click on the icon (Picture A) and navigate You to «Range Update»




4. Switch to «Range Update»

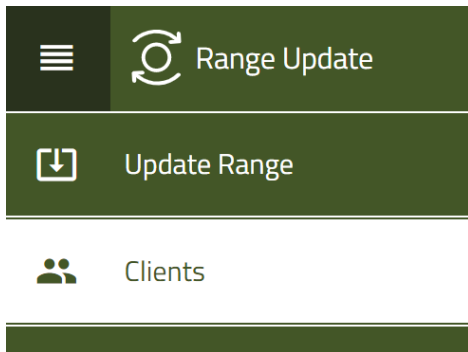


5. click on «Next»
6. Connect a USB stick a click you up «Next»
7. Please make a choice «Download Inventory Files» out of

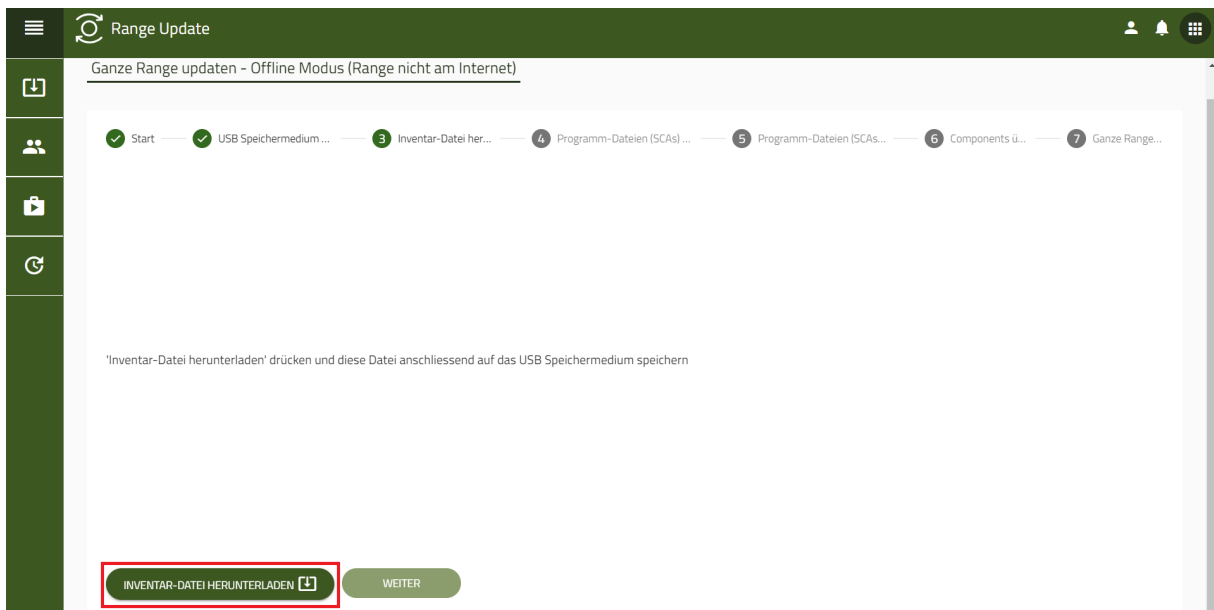


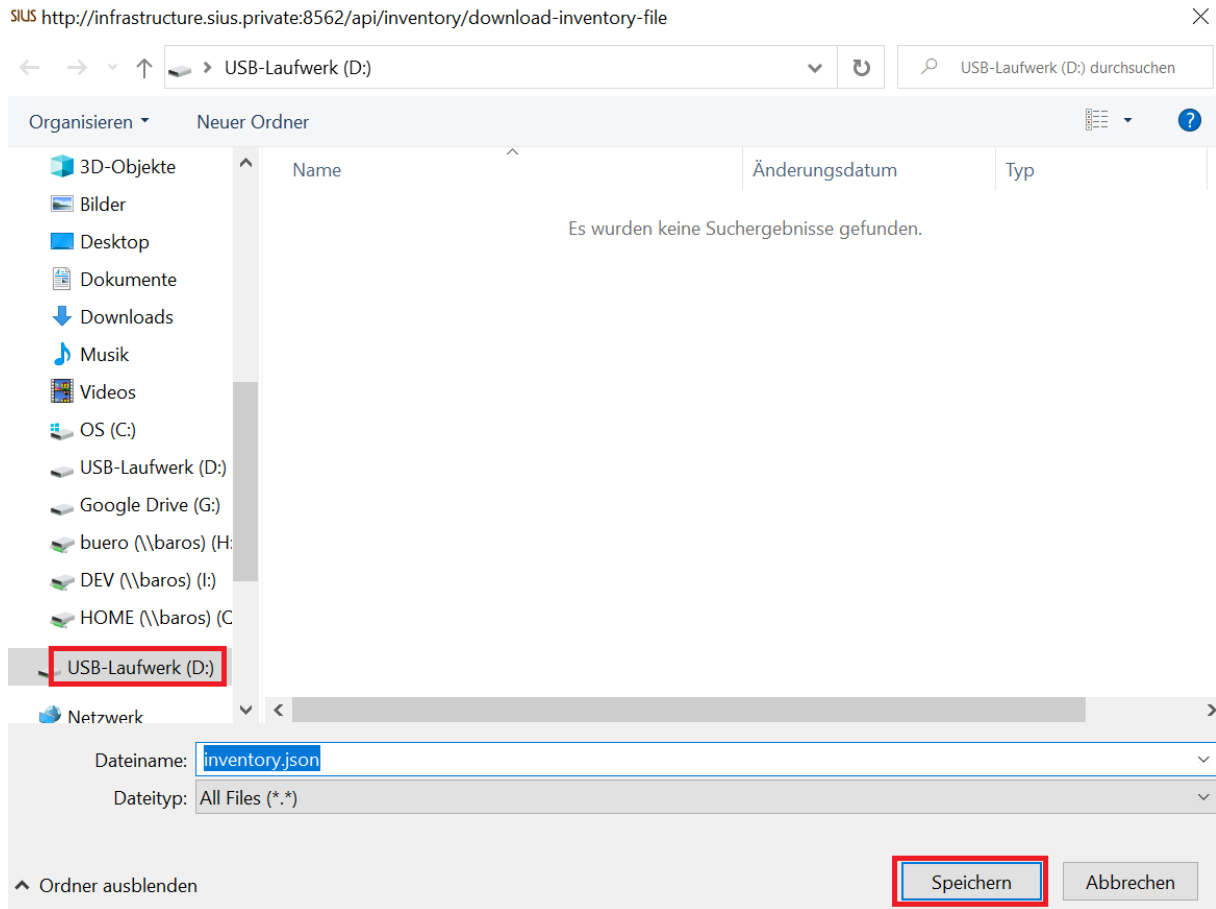


8. Select the USB stick and click «**Save on computer**» (The letter on the USB stick may vary)
9. Start your browser and open the page [software.sius.com](https://software.sius.com)
10. Navigate to «**Offline Update**» top right and click on it
11. click on «**Upload inventory.json File**»
12. Select the USB stick and open the «**inventory.json**» file

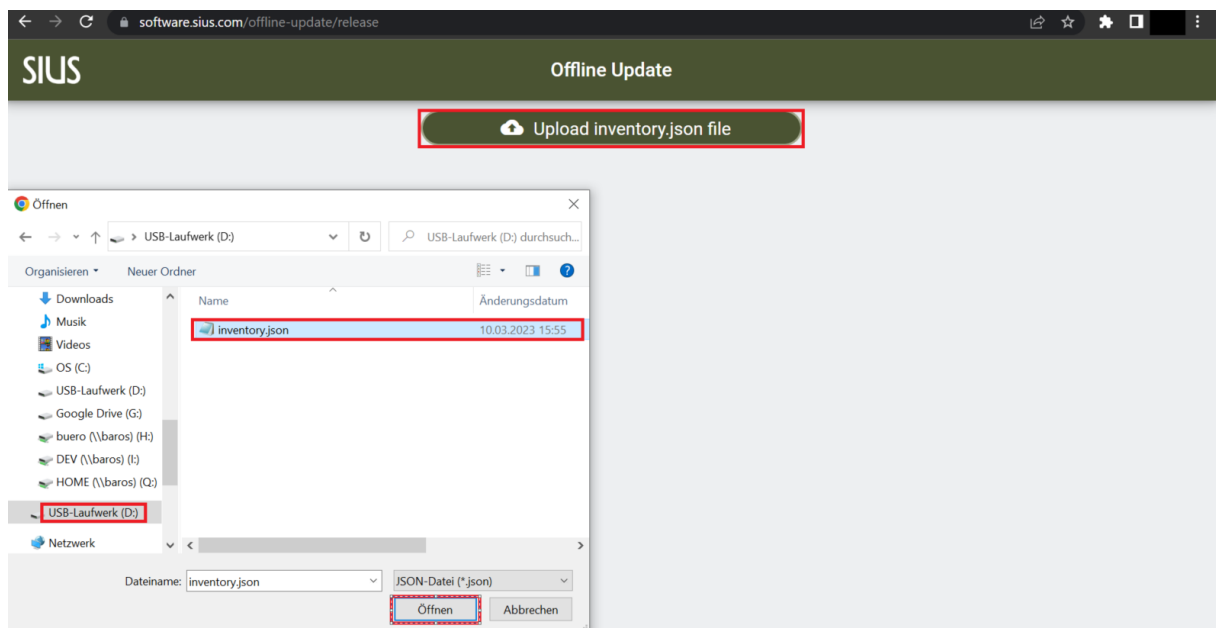


13. Open yours «Explorer» and select Download
14. Right-click the «Sius-Components-archive.zip» pressed hold, drag the folder down and then release.
15. Please make a choice «Extract...» out of

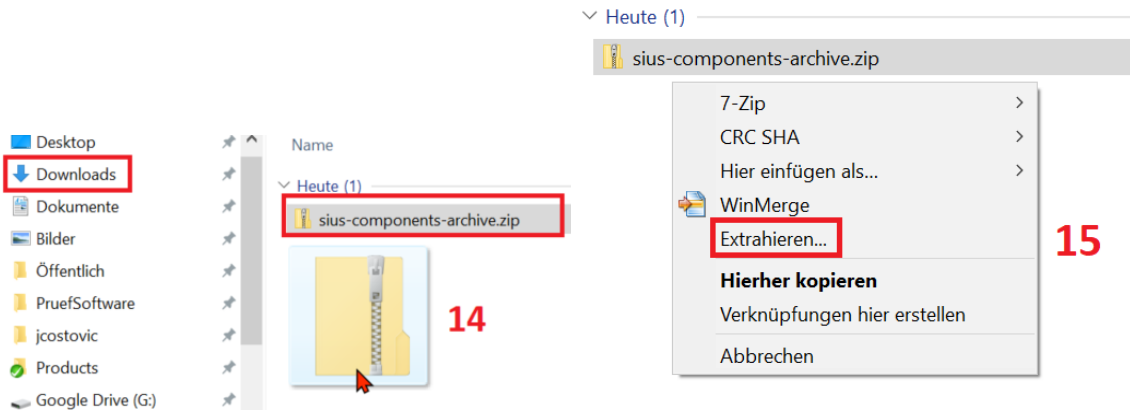

16. Open the new folder«sius-components-archive»
17. Highlight all files and right click
18. Navigate to"Send to" and select the USB stick

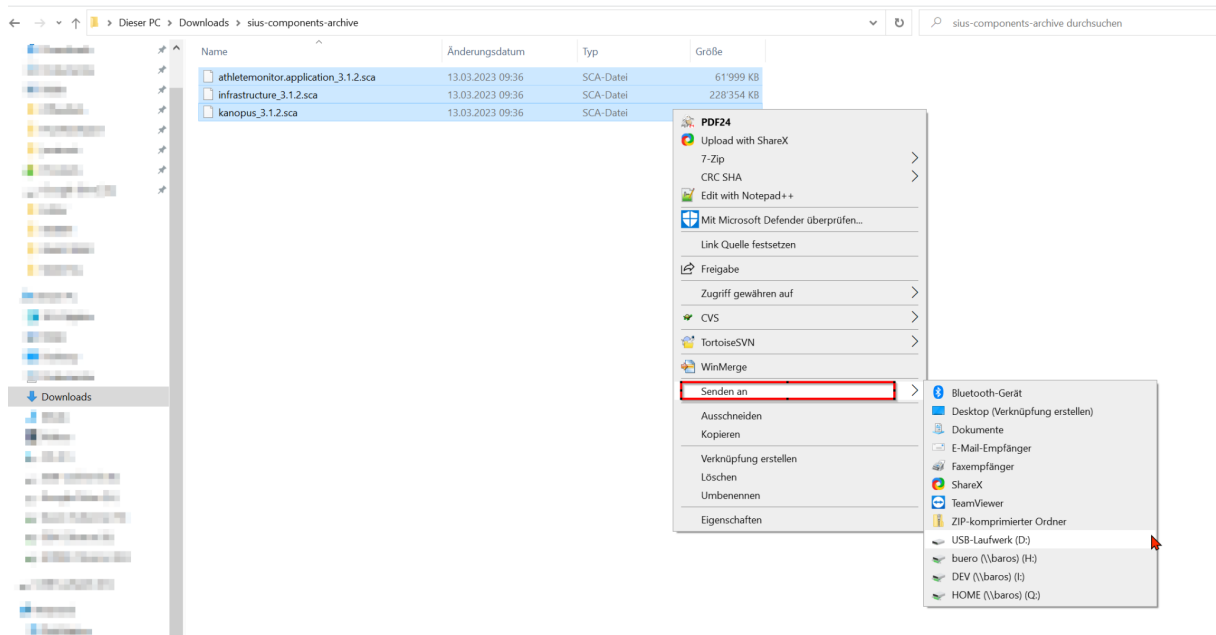

19. Please make a choice «Extract...» out of

 ZIP-komprimierte Ordner extrahieren

Wählen Sie ein Ziel aus und klicken Sie auf "Extrahieren".

Dateien werden in diesen Ordner extrahiert:

C:\Users\jcostovic\Downloads\sius-components-archive


Durchsuchen...

Dateien nach Extrahierung anzeigen


Extrahieren

Abbrechen

20. Now open «Sius Cockpit»
21. Navigate to «Range Update»
22. Please make a choice «Program files (SCAS) already available»

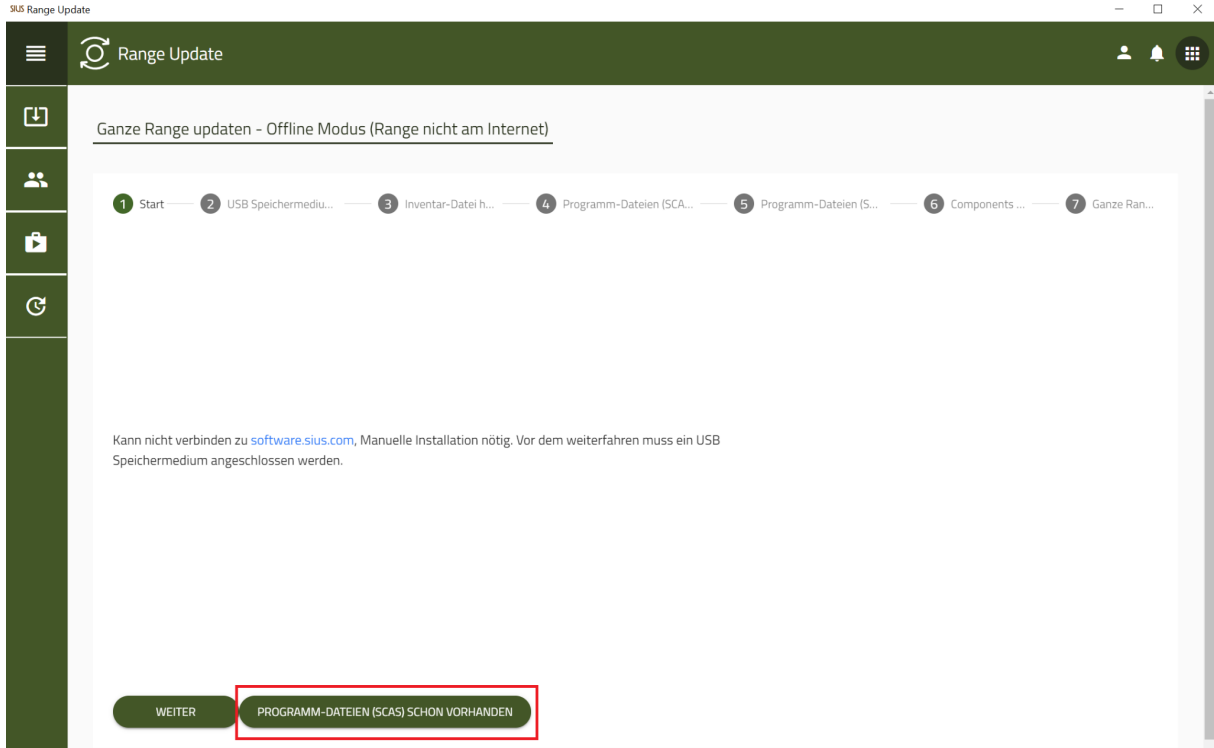


23. click on «Program files (SCAS)upload»
24. Please make a choice «Add to» out of

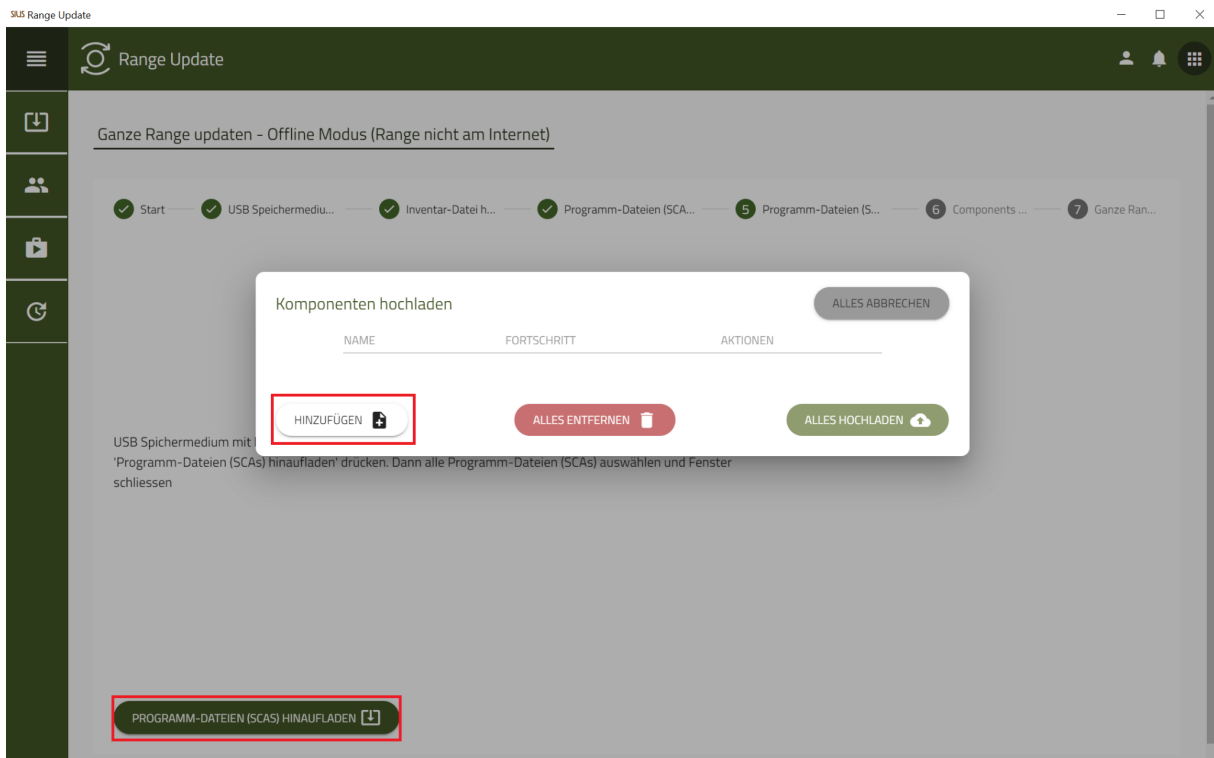


25. Select the USB stick and mark all files, click on «Open»


26. click on «Upload all»

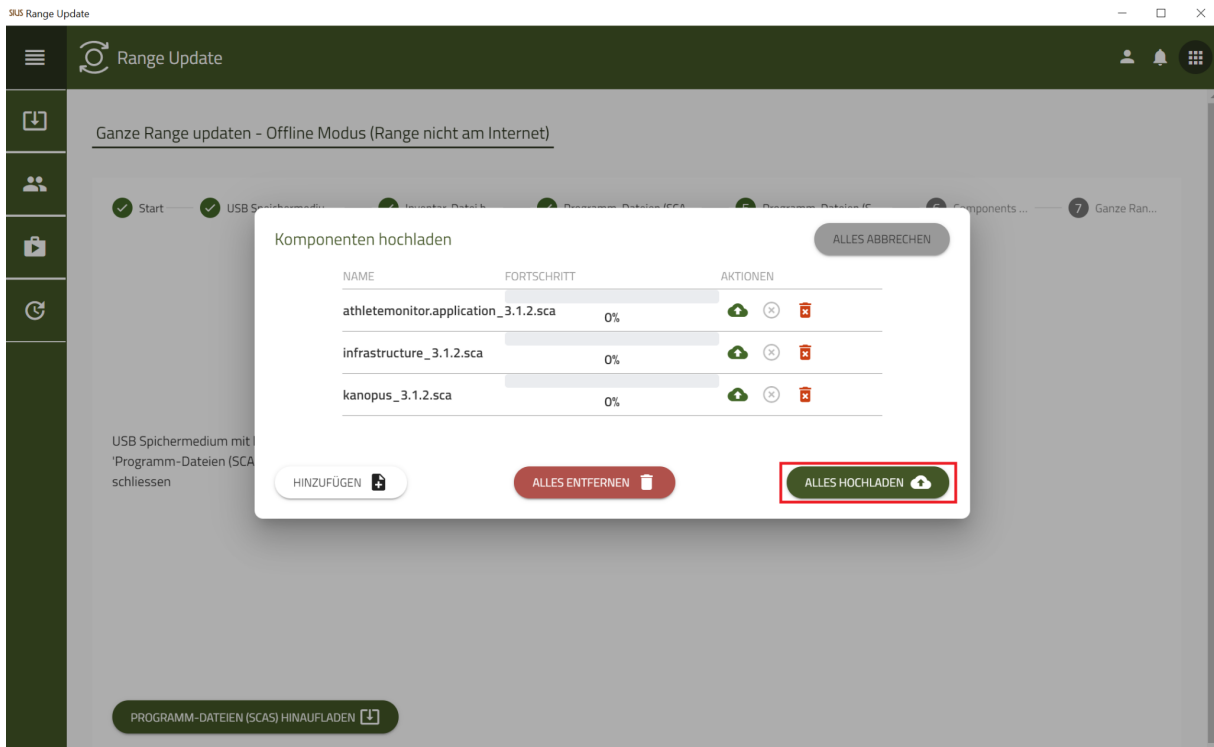

27. click on «Next»

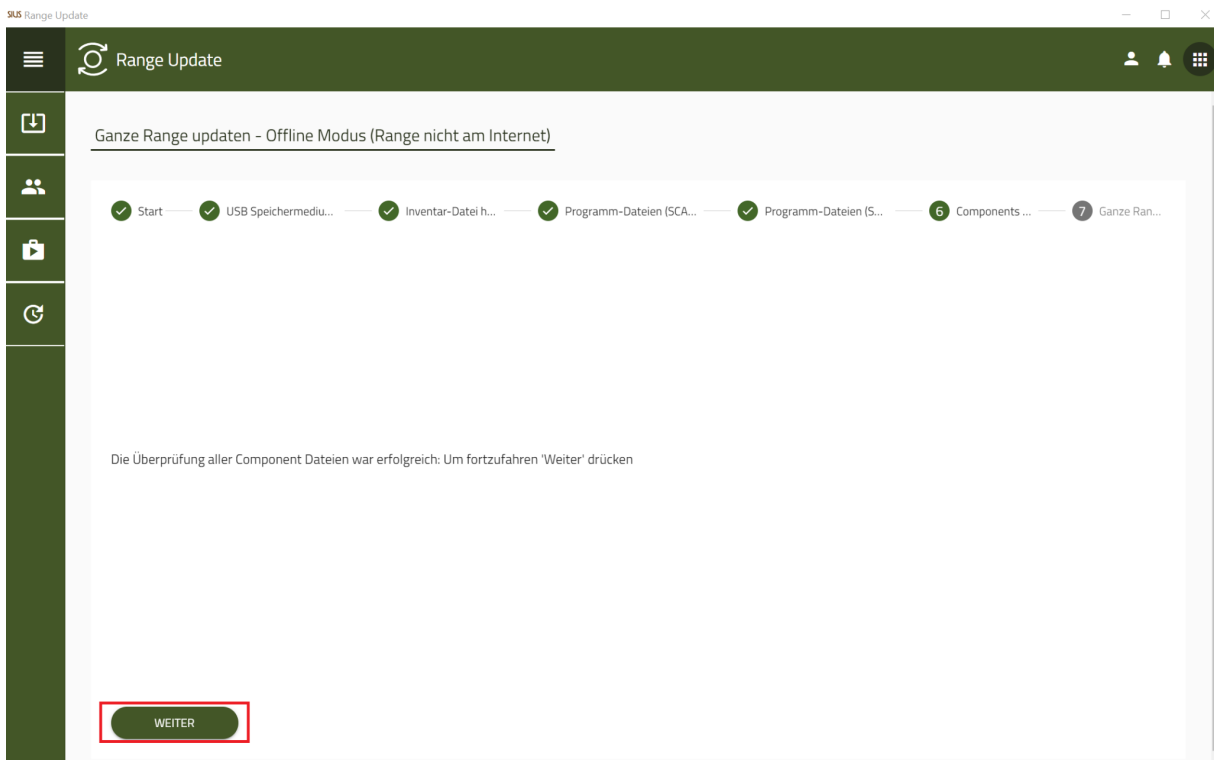

## 28. Please make a choice «Update Range»

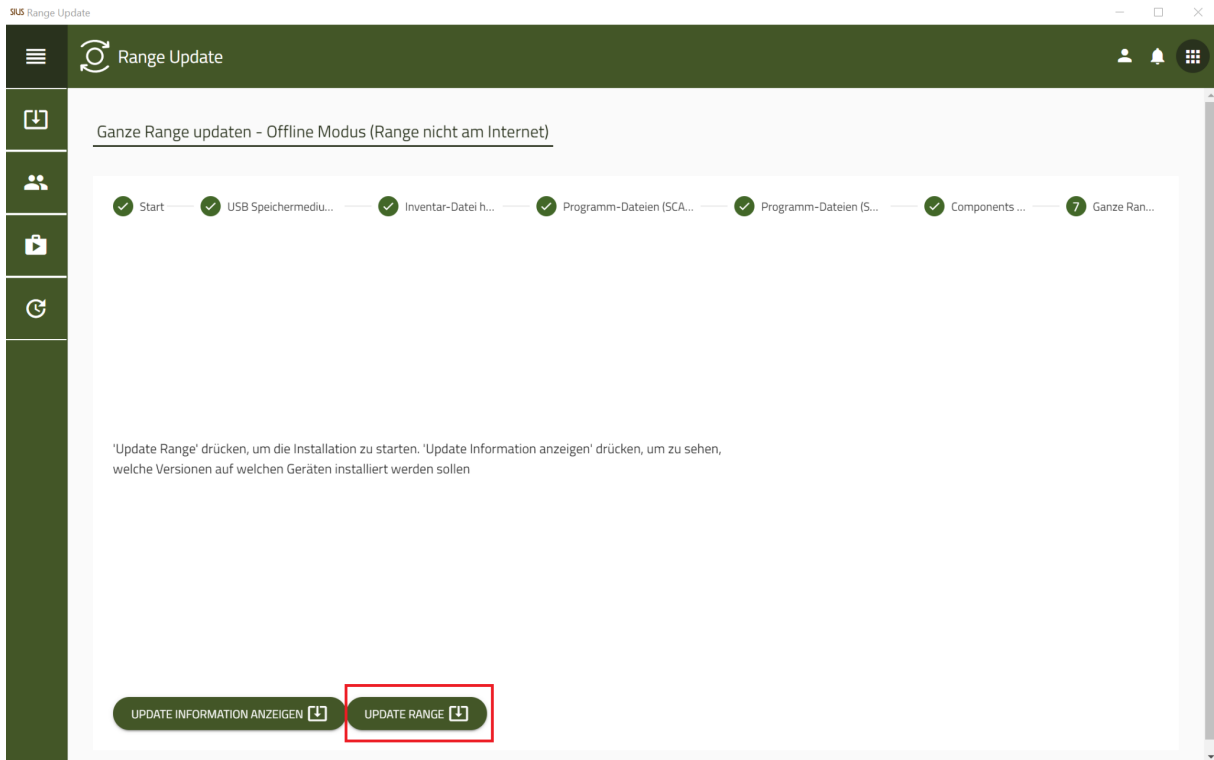

### Information:

If there is an update for the infrastructure, this will be carried out first.

This process can take up to 30 minutes, last.

29. Wait until the status is Finished is, then the system is up-to-date

SIUS Range Update

Range Update

Status: Finished

Update Fortschritt (0%)

Erweitern | Einklappen

Suchen...

Seriennummer	Hostname	Version	Status	Actions
No data				

10 20 50 100 200 400

< 1 >